



Introducing the

Lobo

by **TRANS-LUX**

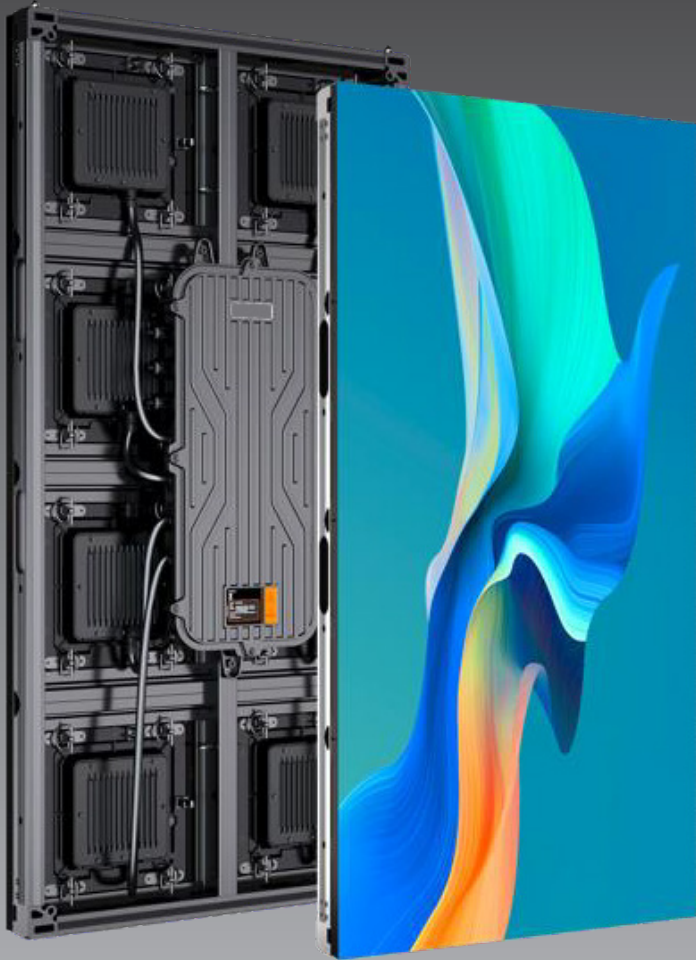

Designed for reliability and stunning visuals, with cutting edge features to make it the most advanced Outdoor Direct View LED panel on the market.



1'x1' Modules in 6mm, 8mm or 10mm Central Power/Data Unit

- **Ultra Reliability** - IP69k weather/dust resistance
- **Improved Viewing and Photo Capture** - 7680Hz refresh rate
- **Highly Efficient, Cooler Performance** - 50 watts/sq ft power
- **Bright, Stunning Visuals** - 8500 nits standard, 16bit color
- **Ultimate Operational Reassurance** - Power & data redundancy*
- **In Depth Performance Metrics** - Smart module functionality
- **Extreme Servicability** - Easy to use module knobs

* optional add-on

www.trans-lux.com

Specifications

Pixel Pitch	6.35mm	8.47mm	10.16mm
Frame* Size (WxH)	1x3ft/2x2ft/2x3ft/2x4ft		
Module Size (WxH)	1x1ft/304.8x304.8mm		
Module Weight	4.8lbs/2.2kg		
PDU Size (WxH)	0.83x1.98ft/251.6x605.1mm		
PDU Weight	11.2lbs/5.1kg		
LED Type	SMD 2727		
Brightness (After Calibration)	8,500nits		
Color Depth	16bit		
LED Refresh Rate	7680Hz		
Color Temperature	2000-9300K		
Viewing Angle (H/V)	H160°/V100°		
LED Lifetime	100,000H		
Service Access	100% Front/100% Rear		
Power Consumption/ft ² (Max.)	50 Watts		
Power Consumption/ft ² (Ave.)	16 Watts		
Ingress Protection	IP69K		
Input Voltage	100-240V AC		
Operating Temperature/Humidity	-4°F~122°F (-20°C~+50°C)/10~90%RH		
Storage Temperature/Humidity	-22°F~+140°F (-30°C~+60°C)/10~80%RH		

* Standard options, others available

