

TRANS-LUX



TL-Slim 1.8 INDOOR SOLUTION


- Three Standard Sizes of Cabinets:
500 x 1000 | 500 x 500 | 500 x 250mm
- Corner Arc Screen Creates Creative Shapes:
90° Right Angle, Round-corner Square
Cylinder, and Wave (Inner & Outer Arcs)
- Easy Maintenance

Mixed Cabinet Installations

The height and the width of the cabinet can be customized by 500mm x 1000mm cabinets, 500mm x 500mm cabinets and 500mm x 250mm cabinets. With these three different sizes it makes creating a variety of creative shapes possible.



Easy Maintenance

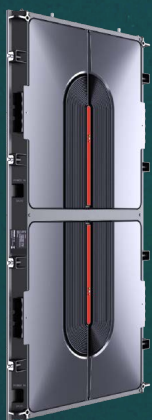

TL-Slim modules support magnetic front maintenance. Modules, receiving cards, and cables can be maintained from the front, greatly reducing labor and steel structure costs.



After opening the back cover, TL-Slim's modules, receiving cards and cables can be maintained from the rear.

Contact Us

800.916.9006 | www.trans-lux.com

Parameter	Value				
Pixel Pitch	1.85mm				
LED Type	3-in-1 SMD				
Brightness	800 cd/m ² (nits)				
Pixels Per Panel 4 sizes:	<table border="1"> <tr> <td>270 x 135px</td> <td>270 x 270px</td> </tr> <tr> <td>405 x 135px</td> <td>270 x 540px</td> </tr> </table>	270 x 135px	270 x 270px	405 x 135px	270 x 540px
270 x 135px	270 x 270px				
405 x 135px	270 x 540px				
Pixel Density	409,600 pixels/m ²				
Weight Per Panel 4 sizes:	<table border="1"> <tr> <td>3.2kg (7.1 lbs)</td> <td>5.6kg (12.3 lbs)</td> </tr> <tr> <td>8.8kg (19.4 lbs)</td> <td>10.5kg (23.1 lbs)</td> </tr> </table>	3.2kg (7.1 lbs)	5.6kg (12.3 lbs)	8.8kg (19.4 lbs)	10.5kg (23.1 lbs)
3.2kg (7.1 lbs)	5.6kg (12.3 lbs)				
8.8kg (19.4 lbs)	10.5kg (23.1 lbs)				
Module Size	W250mm x 250mm (9.8in x 9.8in)				
Panel Size (mm) 4 sizes:	<table border="1"> <tr> <td>500 × 250 × 39.6</td> <td>500 × 500 × 39.6</td> </tr> <tr> <td>750 × 250 × 39.6</td> <td>500 × 1000 × 39.6</td> </tr> </table>	500 × 250 × 39.6	500 × 500 × 39.6	750 × 250 × 39.6	500 × 1000 × 39.6
500 × 250 × 39.6	500 × 500 × 39.6				
750 × 250 × 39.6	500 × 1000 × 39.6				
Curve	0~+5° (Optional, standard is 0°)				
Material	Die-cast Aluminum				
Ingress Protection	IP50/IP10				
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH				
Storage Temperature/Humidity	20°~ +55° / 10~85%RH				
Maintenance	Front & Rear				
Horizontal / Vertical Viewing Angle	155° / 155°				
Color Temperature	2000-9300K Adjustable				
Brightness Control	Manual/Automatic				
Contrast Ratio	5000:1				
Input Power (Max/Typical)	420±10%W/m ² / 140±10%W/m ²				
Processing Depth	14bit				
Video Frame Rate	50/60 Hz				
Refresh Rate	3840 Hz				
Input Voltage	100~240VAC				
Input Power Frequency	50~60 Hz				
Mounting Configurations	Fixed, Floor-mounted, Hanging				
Optional Mounting Configurations	Concave & Convex, Round Shape, Corner Shape				

Specifications are for reference only and are subject to change without notice.